


美标旋启式止回阀



ANSI SWING CHECK VALVE 2-20 H44H-CL300

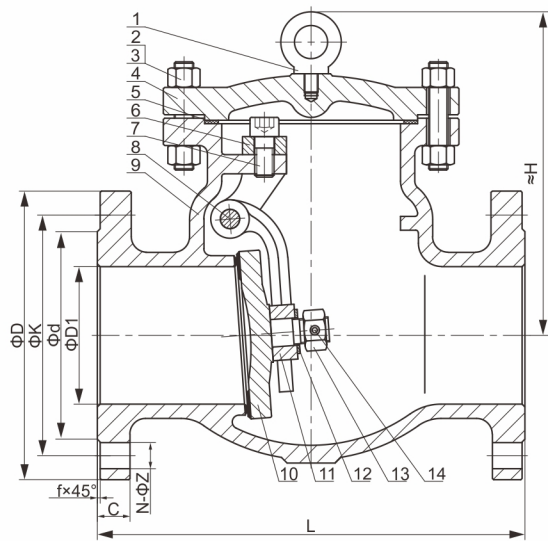

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: BS1868, ASME B16.34;
- 2. 结构长度 Face to Face: ASME B16.10;
- 3. 法兰标准 Flanged Ends: ASME B16.5;
- 4. 检查和试验 Inspection & Testing: API 598.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	吊环螺钉 Eyebolt Screw	B7	
2	螺母 Nut	1035	304
3	螺栓 Screw	1035	304
4	阀盖 Bonnet	SCPH2	SCS13/SCS14
5	密封垫 Gasket	304+Graphite	PTFE
6	支架 Yoke	SCPH2	SCS13/SCS14
7	螺钉 Screw	1035	304

No.	零件名称 PAPT NAME	材质 MATERIAL	
8	圆柱销 Cylindrical Pin	304	304
9	阀体 Body	SCPH2	SCS13/SCS14
10	阀瓣 Disc	SCPH2	SCS13/SCS14
11	摇臂 Rocker	SCPH2	SCS13/SCS14
12	垫片 Gasket	1020	304
13	螺母 Nut	1035	304
14	螺钉 Screw	1035	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	H
2	50	92.1	127.0	165	2	22.7	8-19	267	183
2 1/2	65	104.8	149.2	190	2	25.9	8-22	292	212
3	80	127.0	168.3	210	2	29.0	8-22	318	224
4	100	157.2	200.0	255	2	32.2	8-22	356	244
S	125	185.7	235.0	280	2	35.4	8-22	400	275
6	150	215.9	269.9	320	2	37.0	12-22	444	310
8	200	269.9	330.2	380	2	41.7	12-25	533	365
10	250	323.8	387.4	445	2	48.1	16-29	622	425
12	300	381.0	450.8	520	2	51.3	16-32	711	545
14	350	412.8	514.4	585	2	54.4	20-32	838	580
16	400	469.9	571.5	650	2	57.6	20-35	864	595
18	450	533.4	628.6	710	2	60.8	24-35	978	740
20	500	584.2	685.8	775	2	64.0	24-35	1016	870