



FORGING STEEL VALVE SERIES

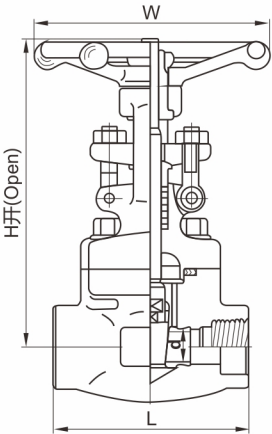

内螺纹与承插焊闸阀(日标)
Female Threaded and Socket Welded Gate Valve (JIS) GA-800


规格 (DN) Specification	R.P	-	15	20	25	32	40	50	65	80
	F.P	8	10	15	20	25	32	40	50	65
结构长度 (mm) Face to face	L	79	79	92	111	120	120	140	178	180
手轮直径 (mm) Handwheel diameter	W	100	95	95	120	120	145	170	200	220
中心高度 (开) (mm) Height	H	150	153	155	189	201	242	272	333	370
流道孔径 (mm) Flow port dimension	d	8	10.5	13.5	18	23	28	35	43	50
重量 Weight (kg)		1.7	1.7	2.2	3.4	4.7	6.3	8.9	16.8	24

螺栓阀盖，缩径和全径,明杆支架 (OS&Y) 末端连接为螺纹或承插焊或对焊，设计按:BS5352

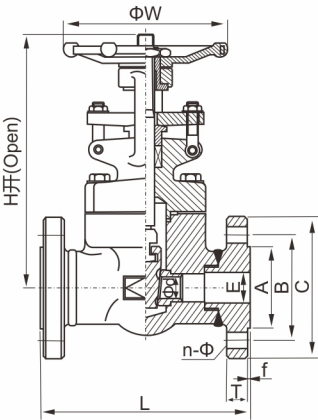

锻钢法兰闸阀(日标)
Forging Steel Flange Gate Valve(JIS) CLASS:10K

DN	Φd	L	H(Open)	ΦW	A	B	C	E	T	f	n-Φ
15	10.5	108	153	95	51	70	95	17	12	1	4-15
20	13	117	155	95	56	75	100	23	14	1	4-15
25	17.5	127	189	120	67	90	125	29	14	1	4-19
32	23.5	140	209	120	76	100	135	35	16	2	4-19
40	28	165	242	145	81	105	140	40	16	2	4-19
50	36	178	272	170	96	120	155	52	16	2	4-19

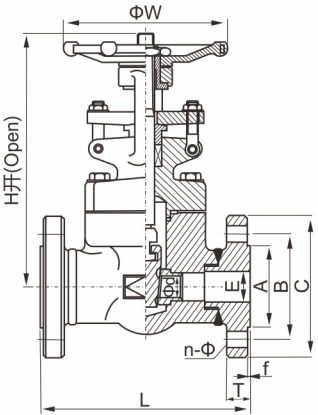

锻钢法兰闸阀(日标)
Forging Steel Flange Gate Valve(JIS) CLASS:20K

DN	Φd	L	H(Open)	ΦW	A	B	C	E	T	f	n-Φ
15	10.5	140	153	95	51	70	95	17	14	1	4-15
20	13	152	155	95	56	75	100	23	16	1	4-15
25	17.5	165	189	120	67	90	125	29	16	1	4-19
32	23.5	178	209	145	76	100	135	35	18	2	4-19
40	28	190	242	145	81	105	140	40	18	2	4-19
50	36	216	272	170	96	120	155	52	18	2	8-19