
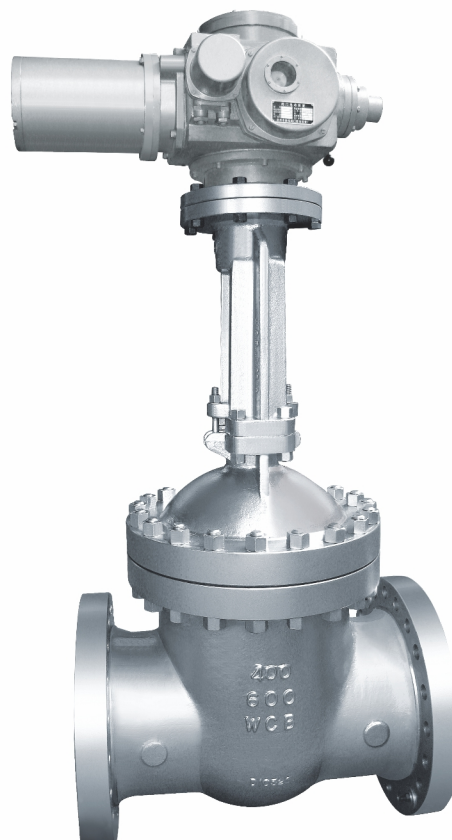


ANSI FLANGE GATE VALVE 2-20 Z40H-CL600

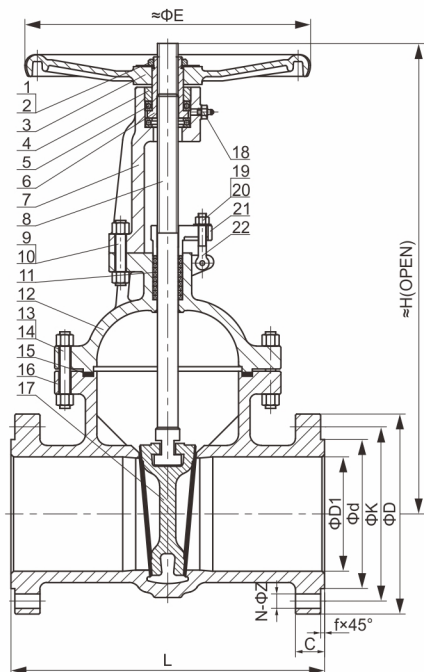

技术要求 Applicable Standards

1. 设计标准 Design Rating: API1600, API 603, ASME B 16.34;
2. 结构长度 Face to Face: ASME B16.10;
3. 法兰标准 Flanged Ends: ASME B16.5;
4. 检查和试验 Inspection & Testing: API1598.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	圆螺母 Round nut	1025	
2	铭牌 Nameplates	Al	
3	手轮 Handwheel	KTH330	
4	轴承压盖 Bearing gland	1025	
5	轴承 Bearing	GCr15	
6	阀杆螺母 Stem nut	QT400/Brass	
7	支架 Stand	WCB	CF8/CF8M
8	阀杆 Stem	F6a	304/316
9	螺母 Nut	2H	304
10	螺柱 Stud	B7	304
11	填料 Packing	Graphite	

No.	零件名称 PAPT NAME	材质 MATERIAL	
12	阀盖 Bonnet	WCB	CF8/CF8M
13	螺母 Nut	2H	304
14	螺柱 Stud	B7	304
15	密封垫 Gasket	304+Graphite	
16	阀体 Body	WCB	CF8/CF8M
17	闸板 Disc	WCB	CF8/CF8M
18	油杯 Oil cup	CU	
19	螺母 Nut	2H	304
20	垫片 Gasket	1020	304
21	填料压盖 Gland	WCB	CF8
22	螺栓 Screw	B7	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	E	H≈
2	50	92.1	127.0	165	7	32.4	8-19	292	280	510
2 1/2	65	104.8	149.2	190	7	35.6	8-22	330	320	550
3	80	127.0	168.3	210	7	38.8	8-22	356	360	595
4	100	157.2	215.9	275	7	45.1	8-25	432	400	710
5	125	185.7	266.7	330	7	51.5	8-29	508	500	830
6	150	215.9	292.1	355	7	54.7	12-29	559	550	995
8	200	269.9	349.2	420	7	62.6	12-32	660	600	1160
10	250	323.8	431.8	510	7	70.5	16-35	787	700	1380
12	300	381.0	489.0	560	7	73.7	20-35	838	800	1605
14	350	412.8	527.0	605	7	76.9	20-38	889	800	1930
16	400	469.9	603.2	685	7	83.2	20-41	991	900	2035
18	450	533.4	654.0	745	7	89.6	20-44	1092	1000	2290
20	500	584.2	723.9	815	7	95.9	24-44	1194	1000	2600