


日标立式止回阀

JIS LIFT CHECK VALVE

40A-300A H42X-10K

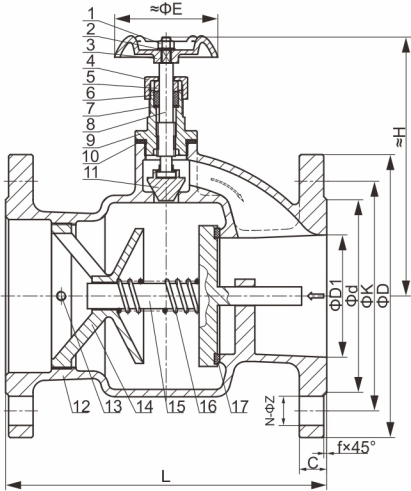

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: JIS B2071, ASME B 16.34;
- 2. 结构长度 Face to Face: JIS B2002;
- 3. 法兰标准 Flanged Ends: JIS B2220;
- 4. 检查和试验 Inspection & Testing: JIS B2003.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL
1	螺母 Nut	304
2	垫圈 Washer	304
3	手轮 Handwheel	KTH330
4	压盖螺母 Gland nut	SCS13
5	填料压套Packing gland	304
6	填料 Packing	PTFE
7	填料垫 Packing pad	304
8	阀杆 Stem	304/316
9	阀盖 Bonnet	SCS13/SCS14

No.	零件名称 PAPT NAME	材质 MATERIAL
10	密封垫 Gasket	PTFE
11	阀瓣 Disc	304/316
12	阀体 Body	SCS13/SCS14
13	螺钉 Screw	304
14	弹簧座 Spring Seat	SCS13/SCS14
15	阀瓣 Disc	SCS13/SCS14
16	弹簧 Spring	304/316
17	阀座 Seat	氟橡胶(FPM)
18		

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	H	E
40A	40	81	105	140	2	16	4-19	160	75	143
50A	50	96	120	155	2	16	4-19	184	75	160
65A	65	116	140	175	2	18	4-19	200	75	165
80A	80	126	150	185	2	18	8-19	210	80	190
100A	100	151	175	210	2	18	8-19	218	80	190
125A	125	182	210	250	2	20	8-23	253	80	240
150A	150	212	240	280	2	22	8-23	280	80	255
200A	200	262	290	330	2	22	12-23	415	80	285
250A	250	324	355	400	2	24	12-25	460	80	305
300A	300	368	400	445	3	24	16-25	605	80	335