
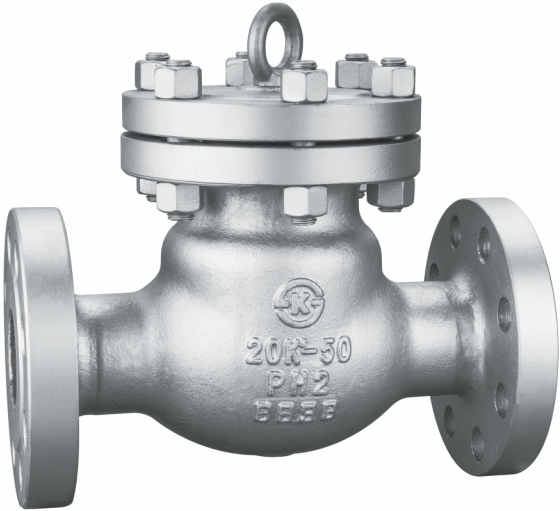


日标旋启式止回阀

JIS SWING CHECK VALVE

50A-500A H44H-20K

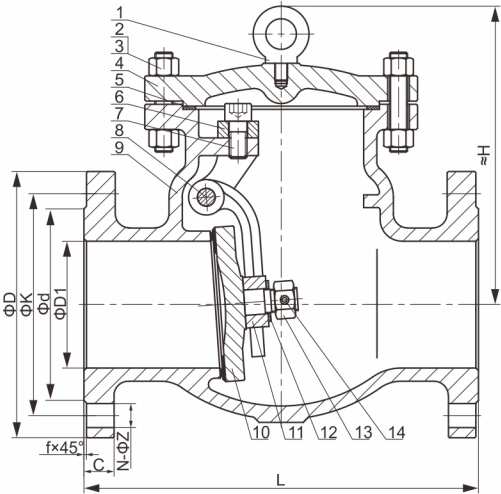

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: KS B2361, JIS B2071;
- 2. 结构长度 Face to Face: KS B2361, JIS B2002;
- 3. 法兰标准 Flanged Ends: KS B2361, JIS B2220;
- 4. 检查和试验 Inspection & Testing: KS B2361, JIS B2003.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	吊环螺钉 Eyebolt Screw	SM25C	
2	螺母 Nut	SM35C	304
3	螺栓 Screw	SM45C	304
4	阀盖 Bonnet	SCPH2	SCS13/SCS14
5	密封垫 Gasket	304 + Graphite	PTFE
6	支架 Yoke	SCPH2	SCS13/SCS14
7	螺钉 Screw	SM35C	304

No.	零件名称 PAPT NAME	材质 MATERIAL	
8	圆柱销 Cylindrical pin	304	304
9	阀体 Body	SCPH2	SCS13/SCS14
10	阀瓣 Disc	SCPH2	SCS13/SCS14
11	摇臂 Rocker	SCPH2	SCS13/SCS14
12	垫片 Gasket	SS400	304
13	螺母 Nut	SM35C	304
14	螺钉 Screw	SM25C	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	H
50A	50	96	120	155	2	22	8-19	267	183
65A	65	116	140	175	2	24	8-19	292	212
80A	80	132	160	200	2	26	8-23	318	224
100A	100	160	185	225	2	28	8-23	356	244
125A	125	195	225	270	2	30	8-25	400	275
150A	150	230	260	305	2	32	12-25	444	310
200A	200	275	305	350	2	34	12-25	533	365
250A	250	345	380	430	2	38	12-27	622	425
300A	300	395	430	480	3	40	16-27	711	545
350A	350	440	480	540	3	40	16-33	838	580
400A	400	495	540	605	3	46	16-33	864	595
450A	450	560	605	675	3	48	20-33	978	740
500A	500	615	660	730	3	50	20-33	1016	870