


美标旋启式止回阀



ANSI SWING CHECK VALVE 2-20 H44H-CL150

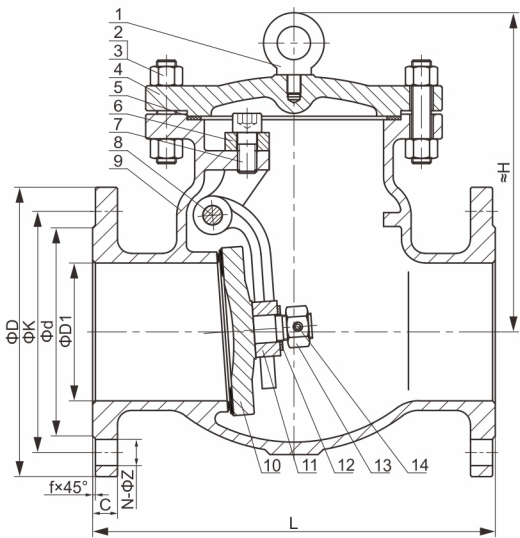

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: BS1868, ASME B16.34;
- 2. 结构长度 Face to Face: ASME B16.10;
- 3. 法兰标准 Flanged Ends: ASME B16.5;
- 4. 检查和试验 Inspection & Testing: API 598.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	吊环螺钉 Eyebolt Screw	B7	
2	螺母 Nut	1035	304
3	螺栓 Screw	1035	304
4	阀盖 Bonnet	WCB	CF8/CF8M
5	密封垫 Gasket	304+ Graphite	PTFE
6	支架 Yoke	WCB	CF8/CF8M
7	螺钉 Screw	1035	304

No.	零件名称 PAPT NAME	材质 MATERIAL	
8	圆柱销 Cylindricalpin	304	304
9	阀体 Body	WCB	CF8/CF8M
10	阀瓣 Disc	WCB	CF8/CF8M
11	摇臂 Rocker	WCB	CF8/CF8M
12	垫片 Gasket	1020	304
13	螺母 Nut	1035	304
14	螺钉 Screw	1035	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	H
2	50	92.1	120.7	150	2	16.3	4-19	203	158
2 1/2	65	104.8	139.7	180	2	17.9	4-19	216	186
3	80	127.0	152.4	190	2	19.5	4-19	241	205
4	100	157.2	190.5	230	2	24.3	8-19	292	235
5	125	185.7	215.9	255	2	24.3	8-22	330	268
6	150	215.9	241.3	280	2	25.9	8-22	356	293
8	200	269.9	298.5	345	2	29.0	8-22	495	359
10	250	323.8	362.0	405	2	30.6	12-25	622	425
12	300	381.0	431.8	485	2	32.2	12-25	698	473
14	350	412.8	476.3	535	2	35.4	12-29	787	499
16	400	469.9	539.8	595	2	37.0	16-29	864	555
18	450	533.4	577.9	635	2	40.1	16-32	978	720
20	500	584.2	635.0	700	2	43.3	20-32	978	810