


日标旋启式止回阀

JIS SWING CHECK VALVE 50A-500A H44H-10K

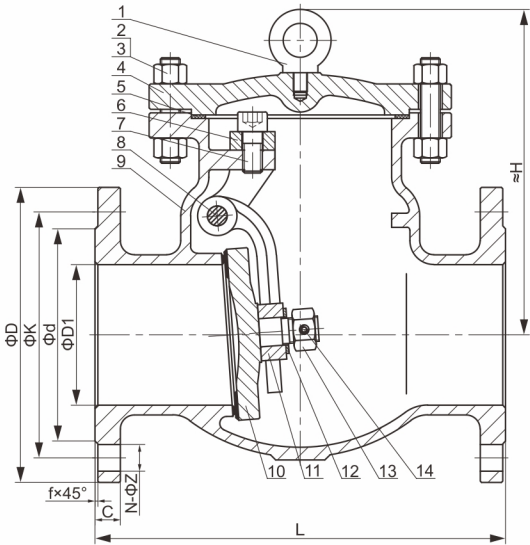

技术要求 Applicable Standards

1. 设计标准 Design Rating: KSB2361, JIS B2071, ASME B 16.34;
2. 结构长度 Face to Face: KSB2361, JIS B2002;
3. 法兰标准 Flanged Ends: KSB2361, JIS B2220;
4. 检查和试验 Inspection & Testing: KSB2361, JIS B2003.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	吊环螺钉 Eyebolt Screw	SM25C	
2	螺母 Nut	SM35C	304
3	螺栓 Screw	SM45C	304
4	阀盖 Bonnet	SCPH2	SCS13/SCS14
5	密封垫 Gasket	304+Graphite	PTFE
6	支架 Yoke	SCPH2	SCS13/SCS14
7	螺钉 Screw	SM35C	304

No.	零件名称 PAPT NAME	材质 MATERIAL	
8	圆柱销 Cylindrical pin	304	304
9	阀体 Body	SCPH2	SCS13/SCS14
10	阀瓣 Disc	SCPH2	SCS13/SCS14
11	摇臂 Rocker	SCPH2	SCS13/SCS14
12	垫片 Gasket	SS400	304
13	螺母 Nut	SM35C	304
14	螺钉 Screw	SM25C	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	H
50A	50	96	120	155	2	16	4-19	203	158
65A	65	116	140	175	2	18	4-19	216	186
80A	80	126	150	185	2	18	8-19	241	205
100A	100	151	175	210	2	18	8-19	292	235
125A	125	182	210	250	2	20	8-23	330	268
150A	150	212	240	280	2	22	8-23	356	293
200A	200	262	290	330	2	22	12-23	495	359
250A	250	324	355	400	2	24	12-25	622	425
300A	300	368	400	445	3	24	16-25	698	473
350A	350	413	445	490	3	26	16-25	787	499
400A	400	475	510	560	3	28	16-27	864	555
450A	450	530	565	620	3	30	20-27	978	720
500A	500	585	620	675	3	30	20-27	978	810