


美标旋启式止回阀

ANSI SWING CHECK VALVE 2-20 H44H-CL600

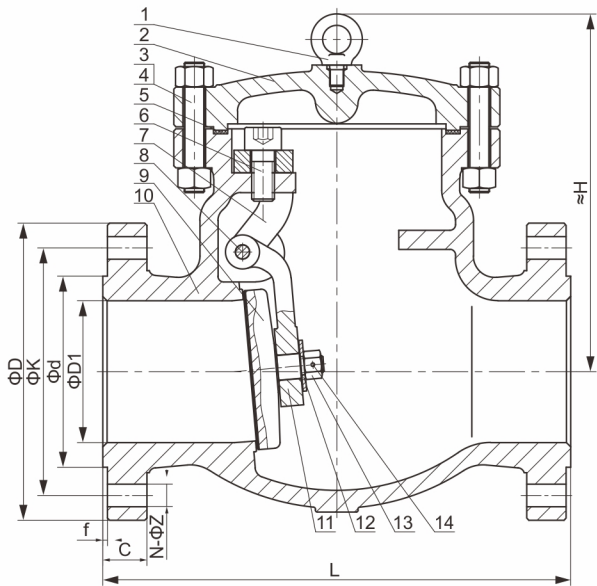

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: BS1868, ASME B16.34;
- 2. 结构长度 Face to Face: ASME B16.10;
- 3. 法兰标准 Flanged Ends: ASME B16.5;
- 4. 检查和试验 Inspection & Testing: API 598.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	吊环螺钉 Eyebolt Screw	B7	
2	阀盖 Bonnet	WCB	CF8/CF8M
3	螺母 Nut	2H	304
4	螺栓 Screw	B7	304
5	密封垫 Gasket	304+Graphite	
6	螺钉 Screw	B7	304
7	支架 Yoke	WCB	CF8/CF8M

No.	零件名称 PAPT NAME	材质 MATERIAL	
8	圆柱销 Cylindricalpin	304	304/316
9	阀瓣 Disc	WCB	CF8/CF8M
10	阀体 Body	WCB	CF8/CF8M
11	摇臂 Rocker	WCB	CF8/CF8M
12	垫片 Gasket	1020	304
13	螺母 Nut	2H	304
14	开口销 Cotter Pin	B7	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	H
2	50	92.1	127.0	165	7	32.4	8-19	292	223
2 1/2	65	104.8	149.2	190	7	35.6	8-22	330	237
3	80	127.0	168.3	210	7	38.8	8-22	356	261
4	100	157.2	215.9	275	7	45.1	8-25	432	364
5	125	185.7	266.7	330	7	51.5	8-29	508	371
6	150	215.9	292.1	355	7	54.7	12-29	559	377
8	200	269.9	349.2	420	7	62.6	12-32	660	505
10	250	323.8	431.8	510	7	70.5	16-35	787	553
12	300	381.0	489.0	560	7	73.7	20-35	838	623
14	350	412.8	527.0	605	7	76.9	20-38	889	687
16	400	469.9	603.2	685	7	83.2	20-41	991	765
18	450	533.4	654.0	745	7	89.6	20-44	1092	817
20	500	584.2	723.9	815	7	95.9	24-44	1194	890