


日标旋启式止回阀

JIS SWING CHECK VALVE 50A-300A H44W-10K

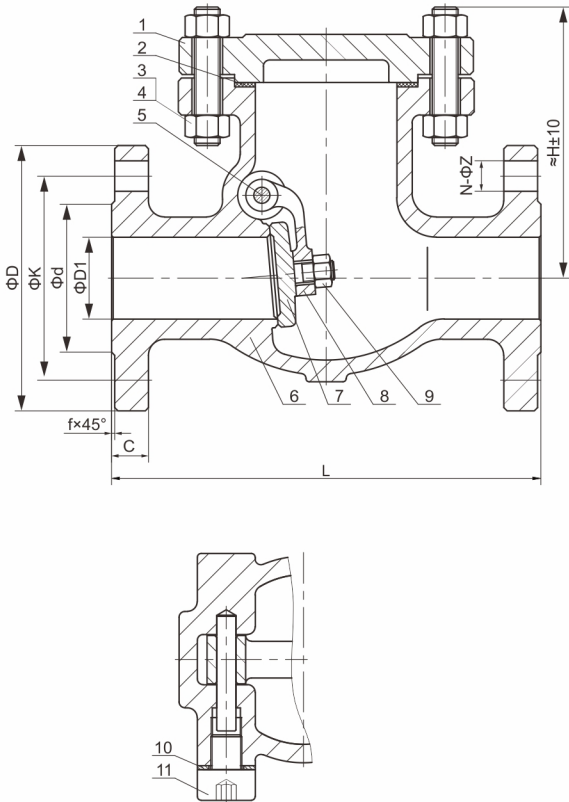

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: JIS B2071, ASME B 16.34;
- 2. 结构长度 Face to Face: JIS B2002;
- 3. 法兰标准 Flanged Ends: JIS B2220;
- 4. 检查和试验 Inspection & Testing: JIS B2003.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL
1	阀盖 Bonnet	SCS13/SCS14
2	密封垫 Gasket	PTFE
3	螺母 Nut	304
4	螺柱 Stud	304
5	圆柱销 Cylindrical pin	304
6	阀体 Body	SCS13/SCS14

No.	零件名称 PAPT NAME	材质 MATERIAL
7	阀瓣 Disc	SCS13/SCS14
8	摇臂 Rocker	SCS13/SCS14
9	螺母 Nut	304
10	密封垫 Gasket	PTFE
11	螺钉 Screw	304
12		

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	H
50A	50	96	120	155	2	16	4-19	203	112
65A	65	116	140	175	2	18	4-19	216	130
80A	80	126	150	185	2	18	8-19	241	147
100A	100	151	175	210	2	18	8-19	292	177
125A	125	182	210	250	2	20	8-23	330	189
150A	150	212	240	280	2	22	8-23	356	209
200A	200	262	290	330	2	22	12-23	495	257
250A	250	324	355	400	2	24	12-25	622	296
300A	300	368	400	445	3	24	16-25	698	343