



美标旋启式止回阀

ANSI SWING CHECK VALVE 2-12 H44W-CL150

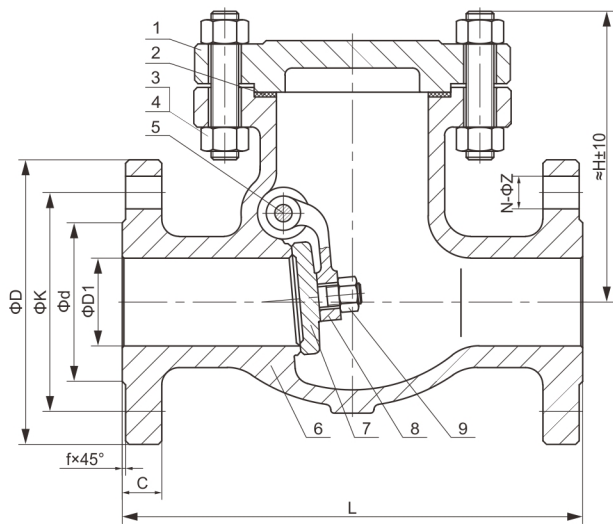

技术要求 Applicable Standards

1. 设计标准 Design Rating: BS1868, ASME B16.34;
2. 结构长度 Face to Face: ASME B16.10;
3. 法兰标准 Flanged Ends: ASME B16.5;
4. 检查和试验 Inspection & Testing: API 598.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL
1	阀盖 Bonnet	CF8/CF8M
2	密封垫 Gasket	PTFE
3	螺母 Nut	304
4	螺柱 Stud	304
5	圆柱销 Cylindrical pin	304
6	阀体 Body	CF8/CF8M

No.	零件名称 PAPT NAME	材质 MATERIAL
7	阀瓣 Disc	CF8/CF8M
8	摇臂 Rocker	CF8/CF8M
9	螺母 Nut	304
10	密封垫 Gasket	PTFE
11	螺钉 Screw	304
12		

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-φZ	L	H
2	50	92.1	120.7	150	2	16.3	4-19	203	112
2 1/2	65	104.8	139.7	180	2	17.9	4-19	216	130
3	80	127.0	152.4	190	2	19.5	4-19	241	147
4	100	157.2	190.5	230	2	24.3	8-19	292	177
5	125	185.7	215.9	255	2	24.3	8-22	330	189
6	150	215.9	241.3	280	2	25.9	8-22	356	209
8	200	269.9	298.5	345	2	29.0	8-22	495	257
10	250	323.8	362.0	405	2	30.6	12-25	622	296
12	300	381.0	431.8	485	2	32.2	12-25	698	343