



日标旋启式止回阀

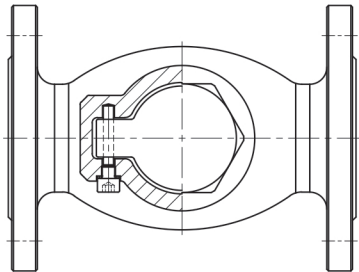

JIS SWING CHECK VALVE 15A-100 H44W-10K

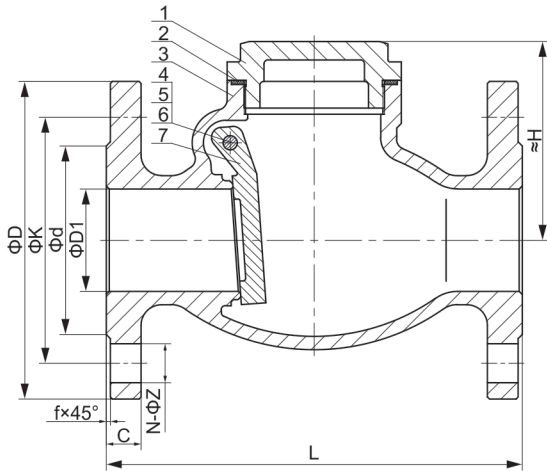

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: JIS B2071, ASME B 16.34;
- 2. 结构长度 Face to Face: JIS B2002;
- 3. 法兰标准 Flanged Ends: JIS B2220;
- 4. 检查和试验 Inspection & Testing: JIS B2003.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL
1	阀盖 Bonnet	SCS13/SCS14
2	密封垫 Gasket	PTFE
3	阀体 Body	SCS13/SCS14
4	螺钉 Screw	304

No.	零件名称 PAPT NAME	材质 MATERIAL
5	圆柱销 Cylindrical pin	304
6	密封垫 Gasket	PTFE
7	阀瓣 Disc	SCS13/SCS14
8		

Note: This diagram expressing only component material details and dimensions; Other shipment please prevail in kind!!!

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

DN	D1	d	K	D	f	C	N-φZ	L	H
15A	15	51	70	95	1	12	4-15	108	56
20A	20	56	75	100	1	14	4-15	117	62
25A	25	67	90	125	1	14	4-19	127	66
32A	32	76	100	135	2	16	4-19	140	68
40A	40	81	105	140	2	16	4-19	165	77
50A	50	96	120	155	2	16	4-19	203	97
65A	65	116	140	175	2	18	4-19	216	113
80A	80	126	150	185	2	18	8-19	241	124
100A	100	151	175	210	2	18	8-19	292	148