


ANSI FLANGE GOLBE VALVE
2-20 J41H-CL150

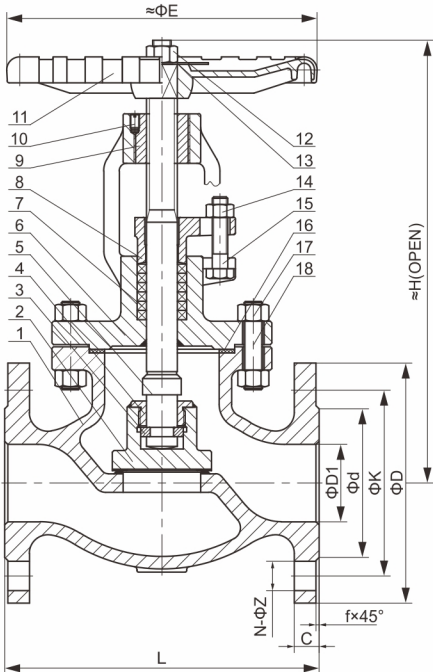

技术要求 Applicable Standards

- 1. 设计标准 Design Rating:BS1873, ASME B16.34;
- 2. 结构长度 Face to Face: ASME B16.10;
- 3. 法兰标准 Flanged Ends:ASME B16.5;
- 4. 检查和试验 Inspection & Testing: API 598.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	阀体 Body	WCB	CF8/CF8M
2	阀瓣 Disc	A105	F304/F316
3	对开圆环 Half Ring	304	304/316
4	阀瓣盖 Disc cover	1035	304/316
5	阀杆 Stem	F6a	304/316
6	阀盖 Bonnet	WCB	CF8/CF8M
7	填料 Packing	Graphite	PTFE
8	填料压盖 Gland	WCB	CF8
9	阀杆螺母 Stem nut	QT400/Brass	

No.	零件名称 PAPT NAME	材质 MATERIAL	
10	螺钉 Screw	B7	304
11	手轮 Handwheel	KTH330	
12	螺母 Nut	2H	304
13	铭牌 Nameplates	Al	
14	螺母 Nut	2H	304
15	螺栓 Screw	B7	304
16	密封垫 Gasket	304+Graphite	PTFE
17	螺母 Nut	2H	304
18	螺栓 Screw	B7	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	E	H
2	50	92.1	120.7	150	2	16.3	4-19	203	200	312
2 1/2	65	104.8	139.7	180	2	17.9	4-19	216	220	331
3	80	127.0	152.4	190	2	19.5	4-19	241	260	389
4	100	157.2	190.5	230	2	24.3	8-19	292	300	418
5	125	185.7	215.9	255	2	24.3	8-22	356	350	475
6	150	215.9	241.3	280	2	25.9	8-22	406	400	517
8	200	269.9	298.5	345	2	29.0	8-22	495	500	632
10	250	323.8	362.0	405	2	30.6	12-25	622	550	955
12	300	381.0	431.8	485	2	32.2	12-25	698	600	1100
14	350	412.8	476.3	535	2	35.4	12-29	787	700	1100
16	400	469.9	539.8	595	2	37.0	16-29	914	800	1350
18	450	533.4	577.9	635	2	40.1	16-32	978	涡轮 Turbine	
20	500	584.2	635.0	700	2	43.3	20-32	978		