
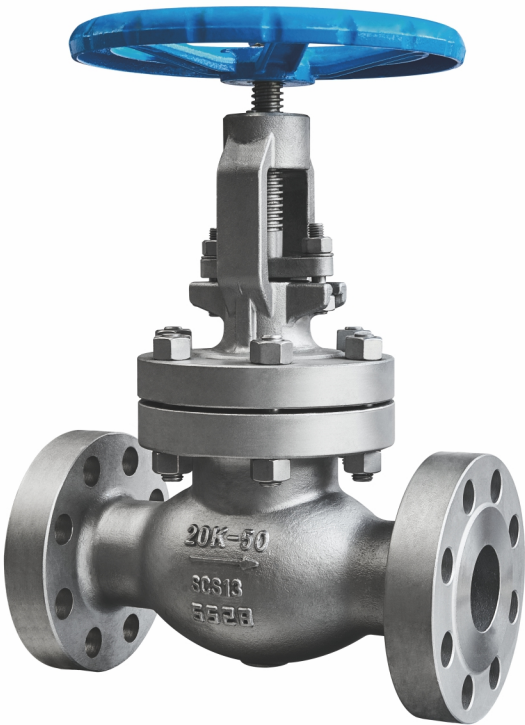


JIS FLANGE GLOBE VALVE  
50A-500A J41H-20K

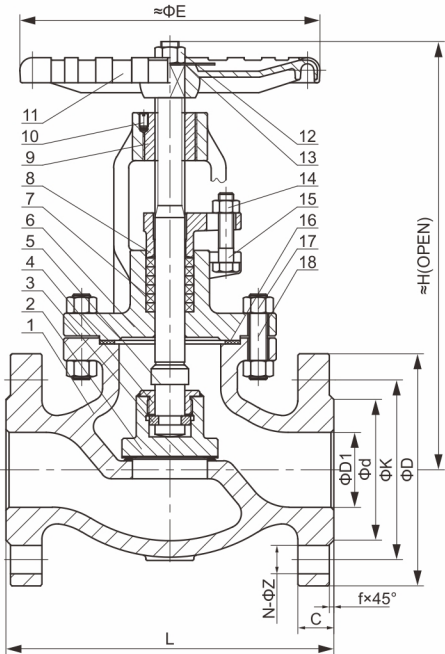

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: KS B2361, JIS B2071;
- 2. 结构长度 Face to Face: KS B2361, JIS B2002;
- 3. 法兰标准 Flanged Ends:KS B2361, JIS B2220;
- 4. 检查和试验 Inspection & Testing: KS B2361, JIS B2003.

主要零部件材料 Main Parts and Materials

| No. | 零件名称 PAPT NAME | 材质 MATERIAL |             |
|-----|----------------|-------------|-------------|
| 1   | 阀体 Body        | SCPH2       | SCS13/SCS14 |
| 2   | 阀瓣 Disc        | SCPH2       | F304/F316   |
| 3   | 对开圆环 Half Ring | 304         | 304/316     |
| 4   | 阀瓣盖 Disc cover | 45#         | 304/316     |
| 5   | 阀杆 Stem        | STS403      | 304/316     |
| 6   | 阀盖 Bonnet      | SCPH2       | SCS13/SCS14 |
| 7   | 填料 Packing     | Graphite    | PTFE        |
| 8   | 填料压盖 Gland     | SCPH2       | SCS13       |
| 9   | 阀杆螺母 Stem nut  | QT400/Brass |             |

| No. | 零件名称 PAPT NAME | 材质 MATERIAL  |      |
|-----|----------------|--------------|------|
| 10  | 螺钉 Screw       | SM25C        | 304  |
| 11  | 手轮 Handwheel   | KTH330       |      |
| 12  | 螺母 Nut         | SM35C        | 304  |
| 13  | 铭牌 Nameplates  | Al           |      |
| 14  | 螺母 Nut         | SM35C        | 304  |
| 15  | 螺栓 Screw       | SM45C        | 304  |
| 16  | 密封垫 Gasket     | 304+Graphite | PTFE |
| 17  | 螺母 Nut         | SM35C        | 304  |
| 18  | 螺栓 Screw       | SM45C        | 304  |

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

| NPS  | D1  | d   | K   | D   | f | C  | N-ΦZ  | L    | E             | H    |
|------|-----|-----|-----|-----|---|----|-------|------|---------------|------|
| 50A  | 50  | 96  | 120 | 155 | 2 | 22 | 8-19  | 267  | 240           | 350  |
| 65A  | 65  | 116 | 140 | 175 | 2 | 24 | 8-19  | 292  | 280           | 410  |
| 80A  | 80  | 132 | 160 | 200 | 2 | 26 | 8-23  | 318  | 300           | 440  |
| 100A | 100 | 160 | 185 | 225 | 2 | 28 | 8-23  | 356  | 350           | 505  |
| 125A | 125 | 195 | 225 | 270 | 2 | 30 | 8-25  | 400  | 400           | 575  |
| 150A | 150 | 230 | 260 | 305 | 2 | 32 | 12-25 | 444  | 450           | 645  |
| 200A | 200 | 275 | 305 | 350 | 2 | 34 | 12-25 | 559  | 550           | 730  |
| 250A | 250 | 345 | 380 | 430 | 2 | 34 | 12-27 | 622  | 600           | 1020 |
| 300A | 300 | 395 | 430 | 480 | 3 | 36 | 16-27 | 711  | 650           | 1150 |
| 350A | 350 | 440 | 480 | 540 | 3 | 40 | 16-33 | 838  | 涡轮<br>Turbine |      |
| 400A | 400 | 495 | 540 | 605 | 3 | 46 | 16-33 | 864  |               |      |
| 450A | 450 | 560 | 605 | 675 | 3 | 48 | 20-33 | 978  |               |      |
| 500A | 500 | 615 | 660 | 730 | 3 | 50 | 20-33 | 1016 |               |      |