


日标法兰截止阀

JIS FLANGE GLOBE VALVE

50A-500A J41H-10K

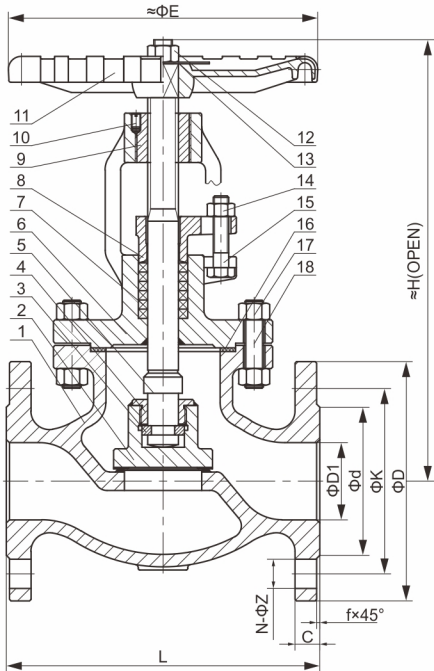

技术要求 Applicable Standards

- 1. 设计标准 Design Rating: KS B2361, JIS B2071, ASME B 16.34;
- 2. 结构长度 Face to Face: KS B2361, JIS B2002;
- 3. 法兰标准 Flanged Ends: KS B2361, JIS B2220;
- 4. 检查和试验 Inspection & Testing: KS B2361, JIS B2003.

主要零部件材料 Main Parts and Materials

No.	零件名称 PAPT NAME	材质 MATERIAL	
1	阀体 Body	SCPH2	SCS13/SCS14
2	阀瓣 Disc	SCPH2	SCS13/SCS14
3	对开圆环 Half Ring	304	304/316
4	阀瓣盖 Disc cover	SM25C	304/316
5	阀杆 Stem	STS403	304/316
6	阀盖 Bonnet	SCPH2	SCS13/SCS14
7	填料 Packing	Graphite	PTFE
8	填料压盖 Gland	SCPH2	SCS13
9	阀杆螺母 Stem nut	QT400/Brass	

No.	零件名称 PAPT NAME	材质 MATERIAL	
10	螺钉 Screw	SM25C	304
11	手轮 Handwheel	KTH330	
12	螺母 Nut	SM35C	304
13	铭牌 Nameplates	Al	
14	螺母 Nut	SM35C	304
15	螺栓 Screw	SM45C	304
16	密封垫 Gasket	304+Graphite	PTFE
17	螺母 Nut	SM35C	304
18	螺栓 Screw	SM45C	304

主要外形尺寸和连接尺寸 Main External and Connecting Dimensions

NPS	D1	d	K	D	f	C	N-ΦZ	L	E	H
50A	50	96	120	155	2	16	4-19	203	200	312
65A	65	116	140	175	2	18	4-19	216	220	331
80A	80	126	150	185	2	18	8-19	241	260	389
100A	100	151	175	210	2	18	8-19	292	300	418
125A	125	182	210	250	2	20	8-23	356	350	475
150A	150	212	240	280	2	22	8-23	406	400	517
200A	200	262	290	330	2	22	12-23	495	500	632
250A	250	324	355	400	2	24	12-25	622	550	955
300A	300	368	400	445	3	24	16-25	698	600	1100
350A	350	413	445	490	3	26	16-25	787	700	1100
400A	400	475	510	560	3	28	16-27	914	800	1350
450A	450	530	565	620	3	30	20-27	978	涡轮 Turbine	
500A	500	585	620	675	3	30	20-27	978		